


Radar level probe SP-10

- ✓ Non-contact level measurement
- ✓ Flow measurement in open channels
- ✓ FMCW radar with 80 GHz technology
- ✓ Compact housing with IP68 protection
- ✓ 4÷20 mA output signal or IO-link digital output
- ✓ Configuration via smartphone or tablet

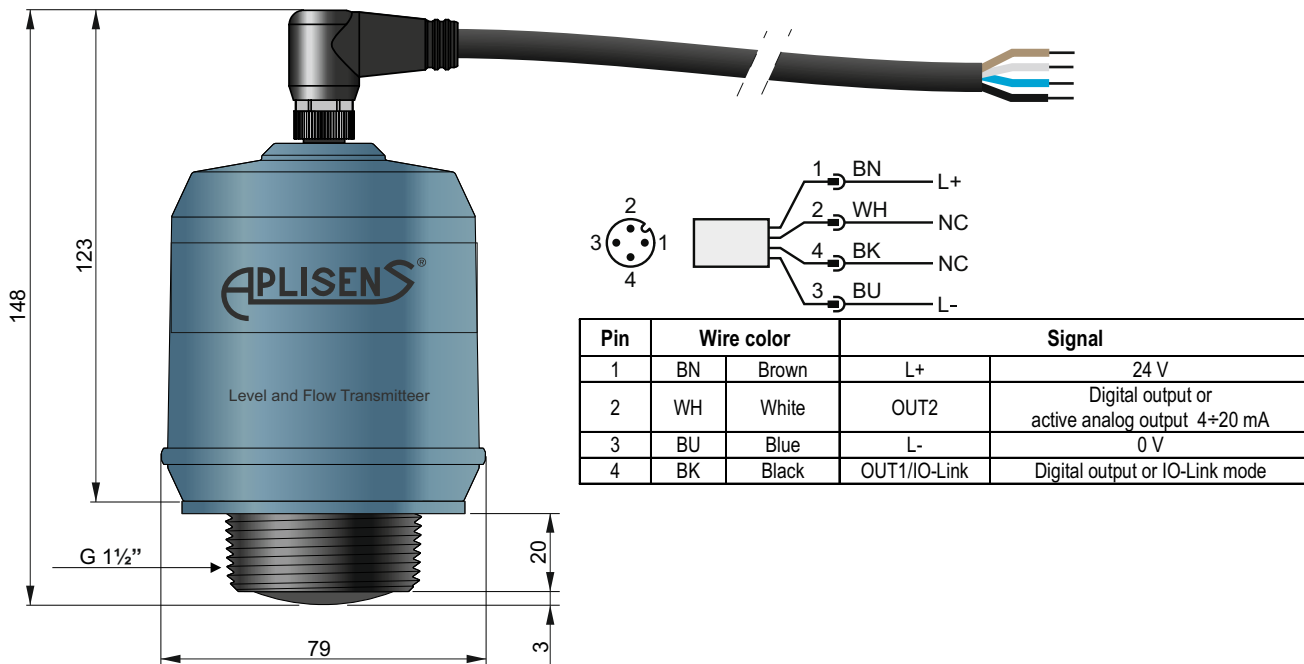

Application

The SP-10 level radar probe is designed to measure the level of liquids or bulk materials in tanks, pools and silos. It can also be used to measure flow in open channels. The device does not come into direct contact with the measured medium during operation. The non-contact measurement method makes the probe widely used in industry because it does not require frequent maintenance and the properties of the medium such as density, viscosity, temperature, pressure and pH do not affect the accuracy and stability of the measurement.

Principles of operation

The SP-10 radar probe uses continuous wave technology with frequency modulation. Frequency Modulated Continuous Wave (FMCW) with a frequency range from 77 to 81 GHz, which ensures high accuracy and reliability of measurement even in small and quickly filling tanks and low sensitivity to internal obstacles.

Construction

The compact housing (IP68) made of PVDF material is resistant to corrosion and difficult environmental conditions, which allows the device to be installed outdoors.

The SP-10 radar probe is equipped with a process connection with external thread G1½" which is compatible with a large number of flanges and adapters. Complete with the probe, a G1½" nut made of PVDF is supplied. For mounting the probe on pipe 2", we recommend dedicated mounting brackets manufactured by Aplisens.

The electrical connection is made using a 10 m long factory cable with an M12 plug.

Configuration

The probe is configured using a mobile device (tablet or smartphone) using short-range wireless technology. The 4÷20 mA signal output ensures ease of integration with new or existing systems.

Technical data


Instrument accuracy (under reference conditions)

±2 mm

Reference conditions

- Measurement object Fixed metal plate, no disturbing objects
- Temperature 15÷25°C
- Ambient pressure 960÷1060 hPa
- Relative humidity 25÷75%
- Damping Default value, 2 s

Accuracy in the measurement range (according to picture)

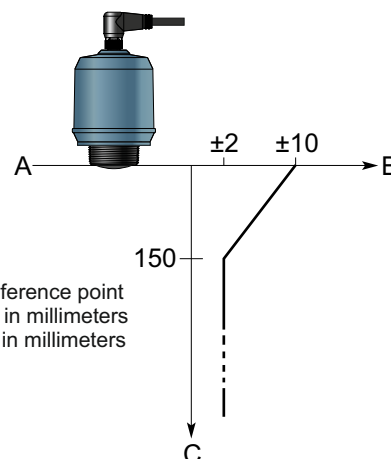

Repeatability

±1 mm

Ambient temperature effect

±1 mm/10 K

Sensor update speed

Minimum 1 update per second (usually 5 updates per second)

Maximum level speed

200 mm/s

Maximum measurement range

15 m

Measurement principle

Frequency Modulated Continuous Wave (FMCW)

Max output power

2 mW

Internal power consumption

< 2 W (normal operation at 24V DC, no outputs)

< 3,6 W (normal operation at 24V DC, active digital and analog outputs)

Humidity

0÷100% relative humidity, non-condensing

Output 1

Digital output / IO-Link mode

Output 2

Digital output or active analog output 4÷20 mA

Failure or measurement error alarm

Low: 3,5 mA (NAMUR ≤ 3,6 mA) or 3,5÷4,0 mA

High: 21,5 mA (NAMUR ≥ 21,0 mA) or 20÷22,5 mA

Process pressure

-100÷300 kPa

Process temperature

-40÷80°C

Ambient temperature

-40÷80°C

Housing

IP68; material - Polyvinylidene fluoride (PVDF)

Connection cable


Length - 10m; Material - PUR; Cross-section - 0,34 mm²

Ordering procedure

SP-10

Accessories

UR Mounting bracket

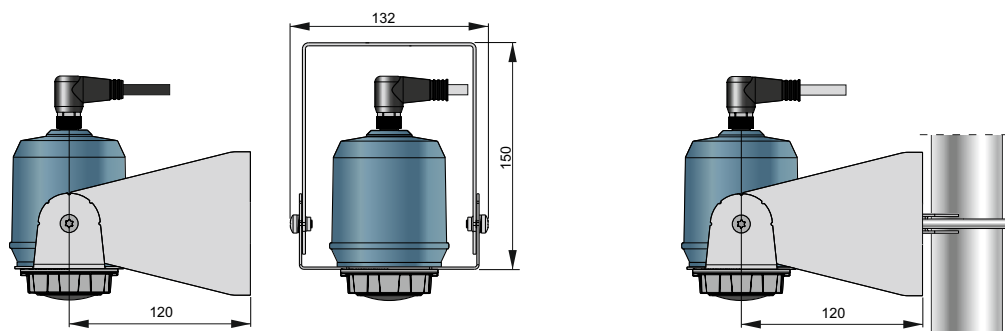

Mounting bracket for mounting the probe on a vertical or horizontal flat surface or 2" pipe.